

# PRODUCT INFORMATION

## EDGE TAPE: 14-DAY


Edge Tape 14-Day Clean Removal provides easy release from floors, yet it's tough enough to hold Ram Board edges securely in place. Edge Tape is engineered to secure the edges of Ram Board directly to the floor without damaging your flooring surfaces, walls and stairs. Durable and tough, yet low tack for easy release for up to 14 days.



EASY RELEASE



NO RESIDUE\*

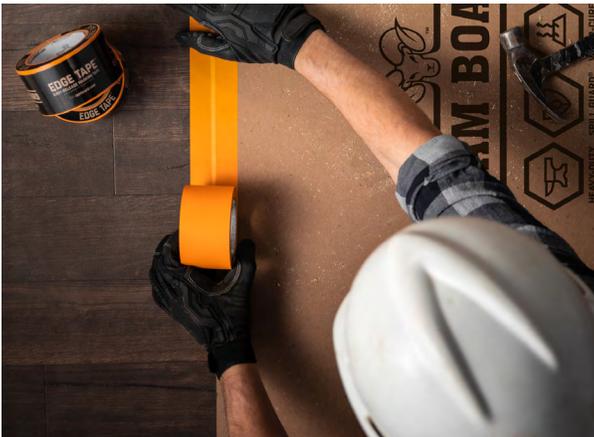

### FEATURES

- Medium-high adhesion
- Releases easily from a variety of surfaces
- Clean Removal
- Bonds tightly to Ram Board®
- 2.5" width for easy installation
- Safety orange identifies edges of flooring.



### APPLICATIONS

- Construction
- Moving
- Remodeling
- Temporary Protection
- Drywall
- Painting
- Model Homes

### AVAILABLE SIZES

RBET 2.5-180 2.5" x 180'

### CHARACTERISTICS

|                             |                        |
|-----------------------------|------------------------|
| Tensile Strength            | 19 lbs/in width        |
| Adhesion to Stainless Steel | 30 oz/in width         |
| Thickness                   | 4.5 mils               |
| Elongation                  | 9%                     |
| Service Temperature Range   | 60°F to 150°F          |
| Backing                     | Colored crepe paper    |
| Adhesive                    | Synthetic rubber-based |

### HANDLING AND STORAGE

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

### SAFETY

SDS sheets for Ram Board products available by request.v

The information in this document was obtained from sources which we believe reliable. The information is provided without any warranty expressed or implied regarding its correctness. We do not assume responsibility for loss, damage or expense in any way connected with the handling, storage, use or disposal of the product.

\*Edge Tape™ is designed to be used to tape Ram Board to the floor. Remove within 14 days. Medium-High Adhesion, not to be used on smooth, delicate surfaces such as painted surfaces, wall paper, faux finishes, lacquer or surfaces with a tendency to peel. Test on a small area before use. In no event will Ram Board's aggregate liability exceed the amount paid for this product. Liability limited to replacement of tape or refund of purchase price.

© 2021 Ram Board, Inc. Product names & attributes trademark of Ram Board, Inc. where applicable.

### CUSTOMER SERVICE

8450 185th STREET  
TINLEY PARK, IL 60487

P 844 4NO MESS  
E customerservice@surfaceshields.com



ramboard.com